

Ballscrews

Accessory

2.4.5.2 Supported bearing BF

The stage height of the supported bearing is matched to the fixed bearing BK (page 115). The correct end machining for the supported bearing is type E10-xx (page 107).

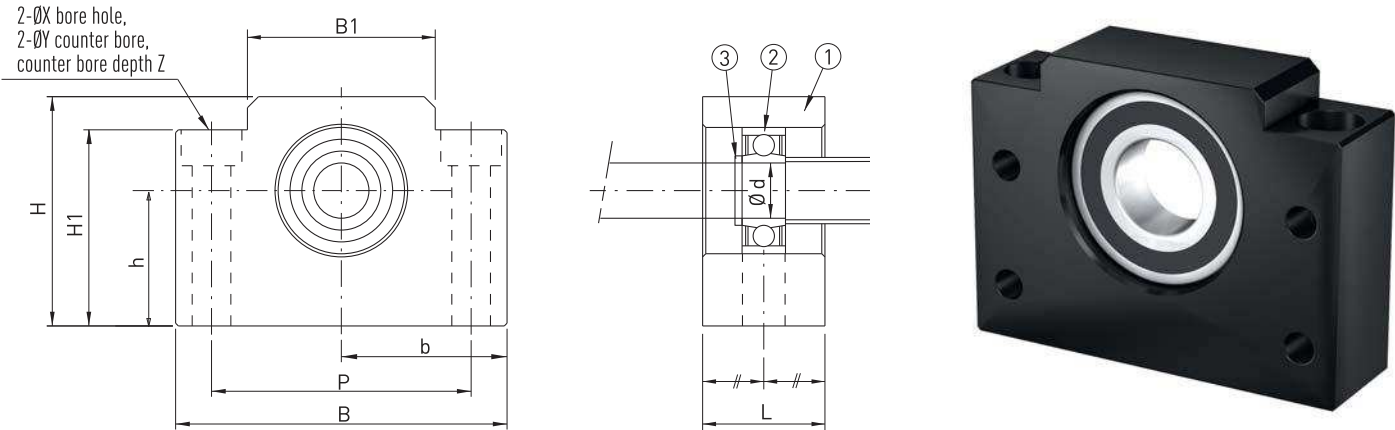


Table 2.39 Dimensions of the bearing unit

Article number	Spindle Ø	d	L	B	H	b ±0,02	h ±0,02	B1	H1	P	X	Y	Z	Bearing	Circlip
BF25	32	25	30	106	80	53	48	64	70	85	11	17	11,0	6205ZZ	S 25
BF30	40	30	32	128	89	64	51	76	78	102	14	20	12,0	6206ZZ	S 30
BF40	50	40	37	160	110	80	60	100	90	130	18	26	17,5	6208ZZ	S 40

(1) housing, (2) bearing, (3) circlip