

Positioning Systems

Linear Axes KK

3.1.10 Linear axes KK50 without cover

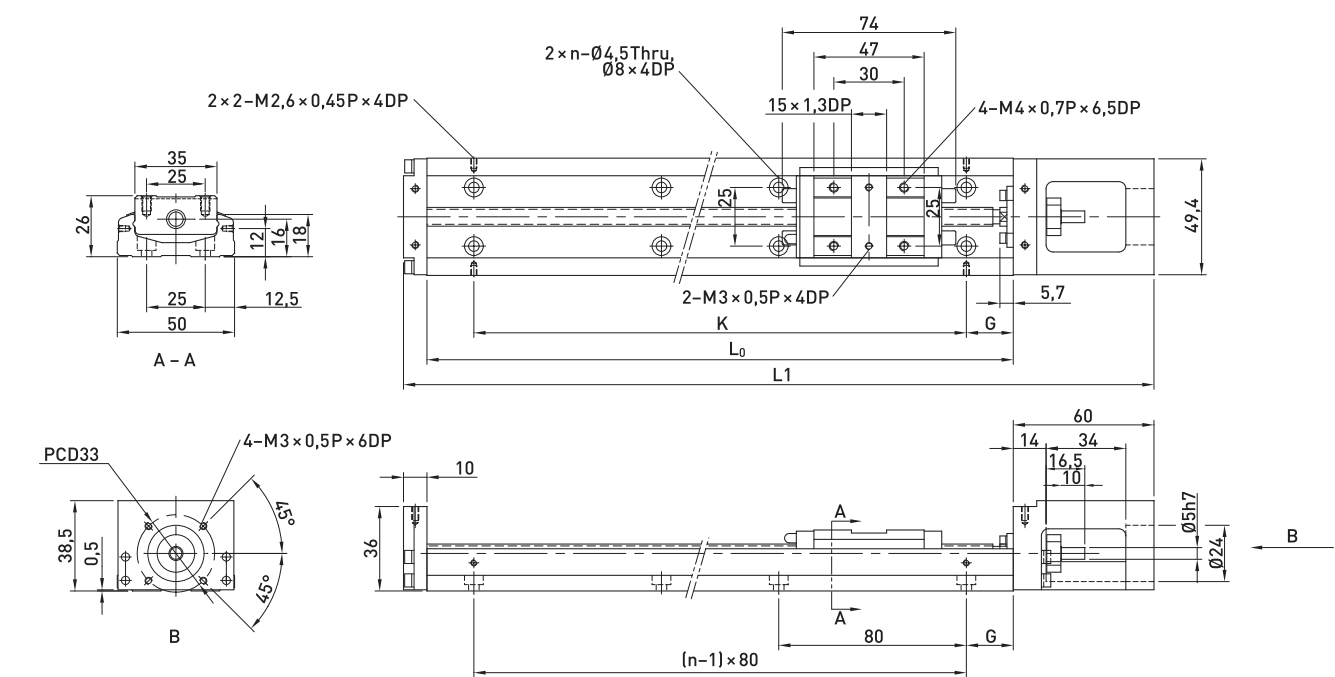


Table 3.50 Dimensions and mass of linear axes KK50 without cover

Model	Lead [mm]	L0 [mm]	L1 [mm]	Maximum stroke [mm]		G [mm]	K [mm]	n	m	Mass [kg]	
				Block A1	Block A2					Block A1	Block A2
KK5002P0150	2	150	220	70	—	35	80	2	—	1,00	—
KK5002P0200	2	200	270	120	55	20	160	3	—	1,20	1,40
KK5002P0250	2	250	320	170	105	45	160	3	—	1,40	1,60
KK5002P0300	2	300	370	220	155	30	240	4	—	1,60	1,80

3.1.11 Linear axes KK50 with aluminium cover

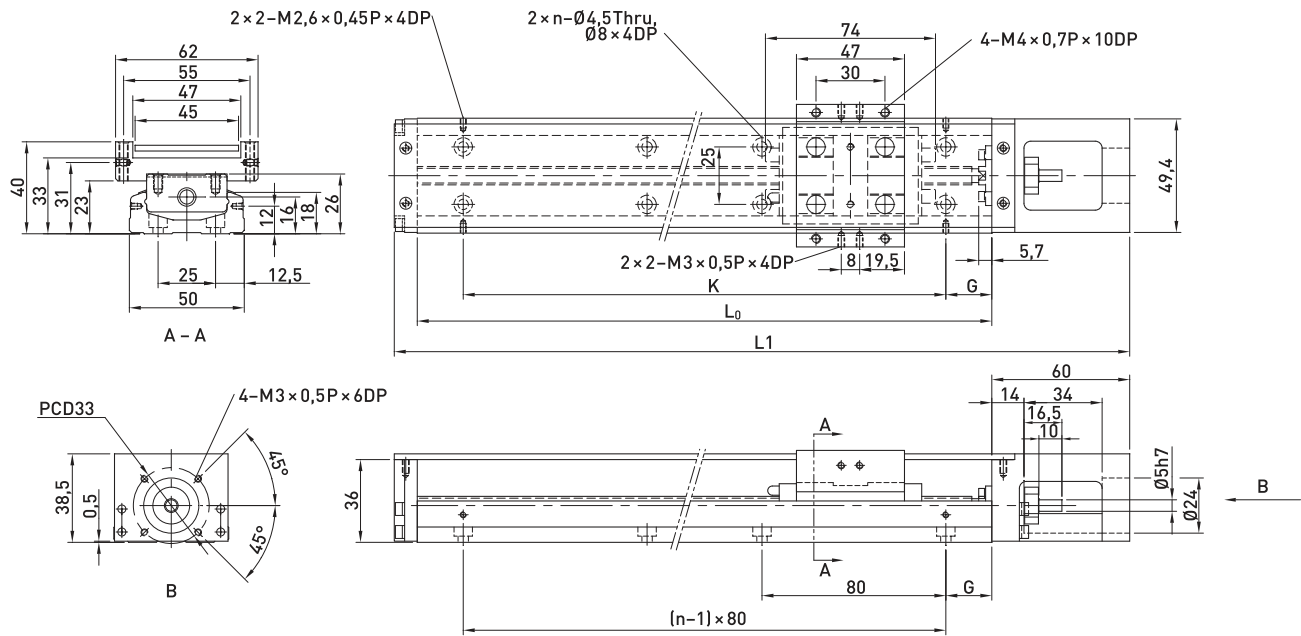



Table 3.51 Dimensions and mass of linear axes KK50 with aluminium cover

Model	Lead [mm]	L0 [mm]	L1 [mm]	Maximum stroke [mm]		G [mm]	K [mm]	n	m	Mass [kg]	
				Block A1	Block A2					Block A1	Block A2
KK5002P0150	2	150	220	70	—	35	80	2	—	1,10	—
KK5002P0200	2	200	270	120	55	20	160	3	—	1,30	1,50
KK5002P0250	2	250	320	170	105	45	160	3	—	1,60	1,80
KK5002P0300	2	300	370	220	155	30	240	4	—	1,80	2,00


Positioning Systems

Linear Axes KK


3.1.12 KK50 adapter flanges

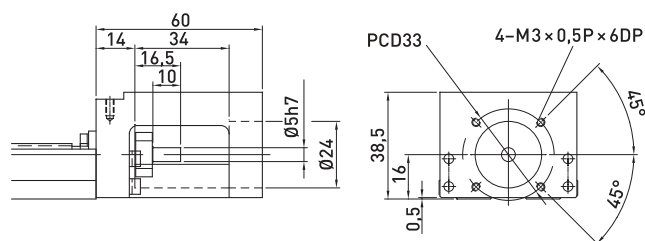


Adapter flange F0

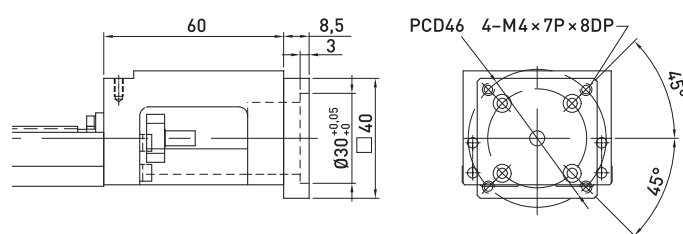


Adapter flange F1

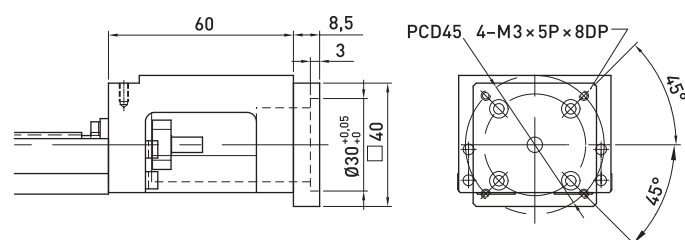


Adapter flange F2

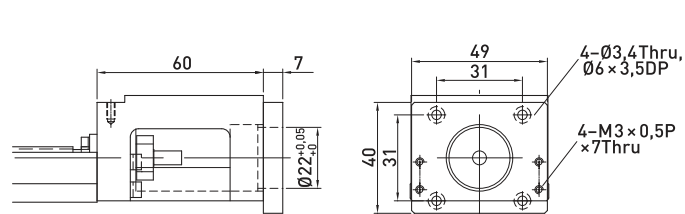


Adapter flange F3

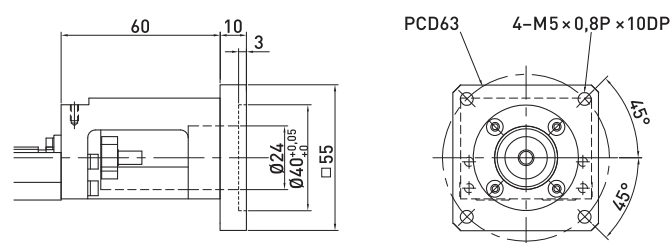


Adapter flange F4

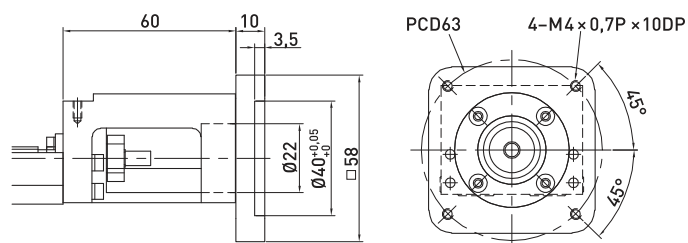

Adapter flange F5

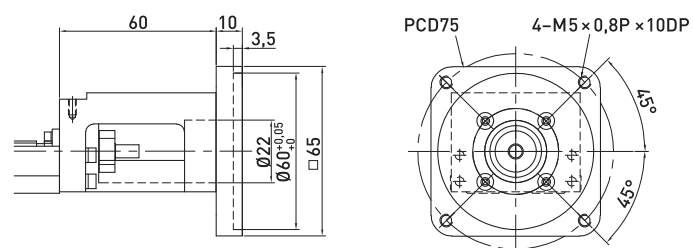

Adapter flange F6

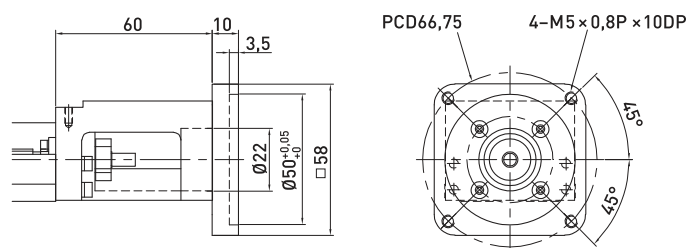

Adapter flange F7